




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>B01F 3/08, 5/06 // A01J 11/16</b>		A1	(11) International Publication Number: <b>WO 98/47606</b>
			(43) International Publication Date: <b>29 October 1998 (29.10.98)</b>
(21) International Application Number: <b>PCT/SE98/00720</b>		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: <b>21 April 1998 (21.04.98)</b>		Published With international search report.	
(30) Priority Data: <b>9701504-4      22 April 1997 (22.04.97)      SE</b>			
(71) Applicant (for all designated States except US): <b>TETRALAVAL HOLDINGS &amp; FINANCE S.A. [CH/CH]; Avenue Général-Guisan 70, CH-1009 Pully (CH).</b>			
(72) Inventors; and (75) Inventors/Applicants (for US only): <b>MALMBERG, Rolf [SE/SE]; Spårsnövägen 44, S-226 52 Lund (SE). HANSSON, Rikard [SE/SE]; Tingsvägen 6, S-241 35 Eslöv (SE).</b>			
(74) Agent: <b>BRUNNSTRÖM, Gunilla; AB Tetra Pak, Patent Dept., Ruben Rausing's gata, S-221 86 Lund (SE).</b>			

(54) Title: **HOMOGENIZER VALVE**

## (57) Abstract

The invention relates to a homogenizer valve (1) which comprises a pressurized, movable valve cone (5), a valve seat (6) and a valve housing (2) which surrounds the cone (5) and the seat (6). The valve cone (5) and the valve seat (6) are disposed such that a throttle occurs between them, which constitutes a homogenization gap (7) having a gap height *h*. Both the cone (5) and the valve seat (6) are preferably rotation-symmetrical, which implies that the homogenization gap (7) will be radial. By extending the total length of the homogenization gap (7), a lower gap height *h* will be obtained. The longer gap length has been realised in that the homogenization gap (7) is concentrically disposed along the radial throttle, in at least two and preferably three concentric gaps (7). The homogenizer valve (1) is intended to be used retrofitted in existing homogenizers and has been particularly produced in order to obtain efficient homogenization for liquids which are processed at a lower pressure and with a greater flow such as, for example, pasteurized milk.

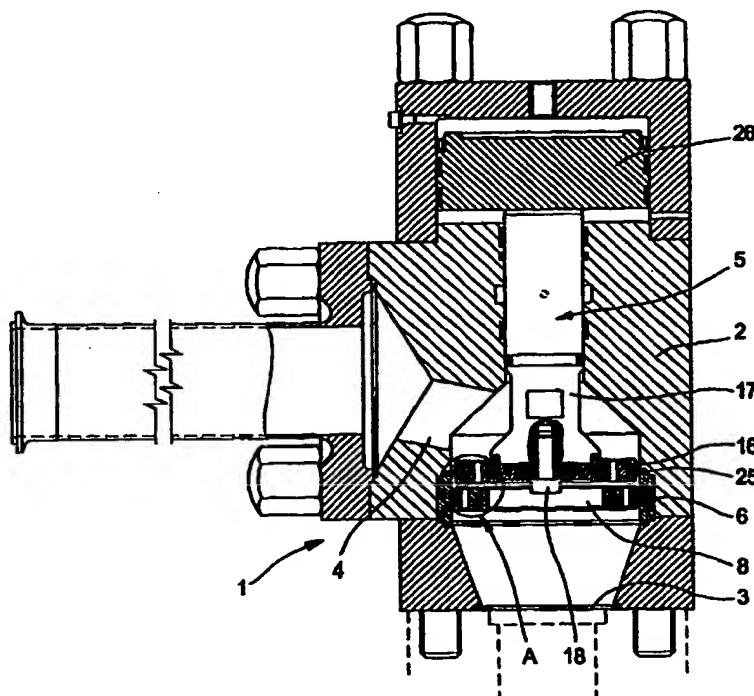

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## HOMOGENIZER VALVE

### TECHNICAL FIELD

The present invention relates to a homogenizer valve comprising a  
5 pressurised, movable valve cone, a valve seat and a valve housing  
surrounding the cone and the seat, the cone and the seat being disposed  
such that a throttle occurs between them, constituting a homogenization gap.

### BACKGROUND ART

10 Homogenization is an industrial process which has long been in use  
and which is intended, in a fat emulsion such as, for example, milk, to split  
the largest fat globules into smaller fat globules and by such means stabilise  
the fat emulsion. For, for example, milk, this implies that cream settling is  
prevented, and the greater part of all consumer milk today is homogenized.

15 The homogenization normally takes place by a mechanical  
processing, such that the fat emulsion, which is at a high input pressure, is  
forced to pass at high speed through a very tight gap where the fat globules  
of the emulsion are broken up as a result of the turbulence which occurs at  
high speeds and by cavitation bubbles which implode in the liquid. The  
20 process takes place during a very short period of time and what happens  
during this period of time is that the speed of the fat emulsion on passage  
increases while the pressure reduces, with the result that the liquid will boil.

A homogenizer consists essentially of a large piston pump which  
gives a high pressure, and a counterpressure device, where the  
25 homogenization proper takes place. The counterpressure device, the  
homogenizer valve in turn consists of a pressurised, resilient valve cone, a  
valve seat and a wear ring, and a valve housing which surrounds the valve  
cone and the valve seat. The valve cone and the seat are normally rotation-  
symmetric and are disposed such that, between these two parts, a radial  
30 throttle occurs, which constitutes a homogenization gap. The height, width  
and length of the gap determine the volume at which the homogenization  
takes place. This volume should be as slight as possible in order to obtain an  
efficient homogenization. The gap height is reduced at a higher pressure of  
the liquid which is to be homogenized, at the same time as a greater flow  
35 implies that the gap height is increased.

Above all in the homogenization of pasteurized milk, compared with UHT-treated milk, use is made of lower pressure at the same time as the intention is to increase the flow quantity. This implies in turn that the homogenizer valve would need to be made larger, so that the gap height is reduced in order to obtain a thorough homogenization at this lower pressure and increased flow. However, it has proved that an up-scaling of existing, well-functioning homogenizer valves does not always work as satisfactorily in practice. The larger the pressurised surface obtained, the greater will be the forces which occur and the homogenizer valve must be even larger. At the same time, the costs for such a homogenizer valve increase by several factors.

Another method of solving the problem is to connect in parallel a number of homogenization gaps and, by such means, obtain an extension of the gap length and thereby a reduction of the gap height. This type of homogenizer valve with parallel-connected homogenization gaps has, however, an as good as fixed gap height. It also suffers from the drawback of suffering from wear in an uneven and uncontrollable manner, which negatively affects the homogenization result.

Swedish Patent Application SE 9600792-7 displays yet a further solution to how the gap length may be extended, in that the homogenization gap has been given undulating pattern along the radial throttle.

#### OBJECTS OF THE INVENTION

One object of the present invention is to realise a homogenizer valve with a gap height of the homogenization gap which is lower, but which may be varied when pressure and flow vary.

A further object of the present invention is to design a valve seat which may be retrofitted in existing homogenizer valves of standard type, but which has a considerably longer gap length and may thereby be employed for much greater flows, without the major costs which a considerably larger homogenizer valve would incur.

Yet a further object of the present invention is that the homogenizer valve permit efficient washing and otherwise satisfy the extremely high demands which are placed on food handling.

## SOLUTION

These and other objects have been attained according to the present invention in that the homogenizer valve of the type described by way of introduction has been given the characterizing feature that the  
5 homogenization gap is concentrically disposed along the throttle.

Preferred embodiments of the present invention have further been given the characterizing features as set forth in the appended subclaims.

## BRIEF DESCRIPTION OF THE ACCOMPANYING DRAWINGS

10 One preferred embodiment of the present invention will now be described in greater detail hereinbelow, with reference to the accompanying Drawings, in which:

Fig. 1 shows, partly in section, a side elevation of the apparatus according to the invention;

15 Fig. 2 shows, partly in section, a magnified detail encircled at A in Fig. 1;

Fig. 3 shows a top plan view of a portion of the valve cone; and

Fig. 4 shows a top plan view of the valve seat.

The Drawings show only those details essential to an understanding  
20 of the present invention, and the placing of the homogenizer valve in the homogenizer, which is well-known to a person skilled in the art, has been omitted.

## DESCRIPTION OF PREFERRED EMBODIMENT

25 A homogenizer valve 1 according to the present invention, as illustrated in Fig. 1, consists substantially of a valve housing 2 with an inlet 3 and an outlet 4 for the liquid which is to be homogenized, and also a valve cone 5 and a valve seat 6. The valve cone 5 and the valve seat 6 are disposed such that there occurs between them a throttle, a homogenization gap 7.

30 In the preferred embodiment, the valve seat 6 is rotation-symmetrical and has a central through flow passage 8 for the liquid which is to be homogenized, constituting an extension of the inlet 3 of the homogenizer valve 1. From a central plane 9, the valve seat 6 is designed such that it is identical on both sides of the central plane 9 and thus may be reversed in the  
35 valve housing 2, which implies a doubled service life for the valve seat 6. Outermost towards its periphery, the valve seat 6 is provided with a collar

10 which serves the same function as the wear ring in conventional homogenizer valves and, thereby, replaces this part.

Inside the collar 10, the valve seat 6 has between two and five elevations 11. These elevations 11 constitute the one bounding definition of the homogenization gap 7. As shown in Fig. 4, the elevations 11 are concentrically disposed around the through flow passage 8 and are, in the preferred embodiment, three in number. The elevations 11 are disposed such that the elevation 11a most proximal the collar 10 is placed on a part 12 of the valve seat which is entirely contiguous with the collar 10. The elevations 11b and 11c are placed on a part 13 which is contiguous with the part 12 only by the intermediary of narrow interconnecting bridges 14. Between the parts 12 and 13 there will thus be obtained channels 15 for a portion of the liquid which is to be homogenized.

The elevations 11 may be designed as in the preferred embodiment and as shown in the detailed illustration in Fig. 2, with a slight upper plane which is at an angle to the surrounding surface. Alternatively, the elevations 11 may be designed with a wider upper plane and with straight bounding definitions to surrounding surfaces.

The valve cone 5, which is also rotation-symmetrical, is pressurised, normally by means of a hydraulic or pneumatic piston 26, but may, in simpler versions, be pressurised by means of a set screw which acts via a spring. The valve cone 5 is also movable, for example by means of oil in the cylinder, in order to absorb the rapid flow variations which occur in the liquid which is to be homogenized. This elasticity is necessary to handle the flow variations which naturally occur in piston pumps.

The valve cone 5 is placed in the valve housing 2 such that there occur, between the valve cone 5 and the elevations 11 of the valve seat 6, concentrically disposed homogenization gaps 7 of a height  $h$ . The side of the valve cone 5 facing towards the valve seat 6 constitutes the second bounding definition of the homogenization gap 7. The height  $h$  of the homogenization gap 7 may be varied with varying pressure and flow, in that the valve cone 5 is moved closer to or further away from the valve seat 6. In the preferred embodiment, the valve seat 6 has three concentrically disposed homogenization gaps 7.

In the preferred embodiment, the valve cone 5 is designed such that the lower portion facing towards the valve seat 6 consists of a separate unit

16, this unit being secured on a central portion 17 of the valve cone 5. The unit 16 may, for example as shown in Fig. 1, be secured by means of a screw 18. From a central plane 19, the unit 16 is designed such that it is identical on both sides of the central plane 19 and is thus reversible, which implies a  
5 doubled service life for the unit 16 of the valve cone 5.

As shown in Fig. 3, the unit 16 of the valve cone 5 is designed such that it has a whole central portion 20 and a portion 21 concentrically surrounding this portion 20 and contiguous with the central portion 20 only by the intermediary of narrow interconnecting bridges 22. Between these  
10 portions 20 and 21, there thus occur channels 23 for the liquid which has been homogenized.

The liquid, normally milk, which is to be homogenized is led into the homogenizer where it is pressurised to approx. 10-25 Mpa. The milk normally has a fat content of 0.5-3.5% and is at a temperature of 55-80°C.

15 The liquid is led in through the inlet 3 and, as shown by arrows in Fig. 2, when it reaches the valve seat 6, the liquid is divided, partly in the through flow channel 8 and partly in the channels 15. Thereafter, the liquid passes one of the three homogenization gaps 7 where homogenization takes place and the liquid thereafter distributes itself, partly through the channels  
20 23 and partly through a channel 24 formed between the valve cone 5 and the collar 10 of the valve seat 6. Since the liquid always strives to follow the simplest route, there will be obtained a relatively uniform distribution of liquid through the three homogenization gaps 7. After homogenization, the liquid passes out of the homogenizer valve 1 through the outlet 4.

25 The gap height  $h$  is normally 50-200 $\mu$ m. In the passage, there is a very rapid pressure drop, down to 0 Mpa, at the same time as the speed of flow of the liquid increases, with the result that the liquid begins to boil. When the liquid leaves the gap 7, its speed is reduced and the pressure once again increases. The liquid ceases to boil and the vapour bubbles in the liquid  
30 implode. The entire process takes place in the space of a few fractions of a second and, in the violent processes where the high speed gives rise to turbulence and cavitation, the fat particles which are in the liquid will be split into smaller particles or globules.

By obtaining a uniform distribution of the liquid between the three  
35 homogenization gaps 7, and also that the liquid passes at right angles over the gap 7, there will be obtained an extremely efficient utilisation of the

increased gap length, and a homogenizer with a homogenizer valve 1 according to the present invention is capable of handling roughly three times as large a flow as a conventional homogenizer valve. In order to handle the same flow in a conventional homogenizer valve, this would need  
5 to be scaled up approximately nine times, concerning weight and volume, and the cost for such a homogenizer valve would be more than ten times greater.

Given that the valve seat 6 and the unit 16 of the valve cone 5 display hygienic seals 25 against the valve housing 2 and against the portion 17,  
10 respectively, there will be obtained a hygienic homogenizer valve 1 which satisfies the requirements of the food industry and which may be washed using conventional equipment.

As will have been apparent from the foregoing description, the present invention realises a homogenizer valve 1 which may be employed  
15 for retrofitting in existing homogenizers, but which is capable of handling roughly three times as large a flow as a corresponding conventional homogenizer valve.



**WHAT IS CLAIMED IS:**


1. A homogenizer valve (1) comprising a pressurised, movable valve cone (5), a valve seat (6) and a valve housing (2) surrounding the cone (5) and the seat (6), said cone (5) and said seat (6) being disposed such that a throttle occurs between them, constituting a homogenization gap (7), characterized in that the homogenization gap (7) is concentrically disposed along the throttle.
2. The homogenizer valve (1) as claimed in Claim 1, characterized in that the valve cone (5) and the valve seat (6) are rotation-symmetrical.
3. The homogenizer valve (1) as claimed in any of the preceding Claims, characterized in that the homogenization gap (7) is radially disposed.
4. The homogenizer valve (1) as claimed in Claim 3, characterized in that the homogenization gap (7) consists of at least two and preferably three concentric gaps (7).
5. The homogenizer valve (1) as claimed in any of the preceding Claims, characterized in that the valve seat (6) consists of a collar (10), a part (12) contiguous with the collar (10) and a part (13) which is contiguous with the part (12) by the intermediary of narrow interconnecting bridges (14), for the formation of channels (15) between the parts (12) and (13).
6. The homogenizer valve (1) as claimed in Claim 5, characterized in that the parts (12, 13) of the valve seat (6) have elevations (11) placed such that one elevation (11a) is placed on the part (12) and that two elevations (11b, 11c) are placed on the part (13), said elevations (11) constituting the one bounding definition of the homogenization gap (7).
7. The homogenizer valve (1) as claimed in any of the preceding Claims, characterized in that from a central plane (9), the valve seat (6) is designed such that it is identical on both sides of the central plane (9).

8. The homogenizer valve (1) as claimed in any of the preceding Claims, characterized in that the valve cone (5) consists of a central portion (17) and a unit (16), said unit (16) being secured by means of screw (18) on that end of the central portion (17) which is turned to face towards the valve seat (6).


9. The homogenizer valve (1) as claimed in Claim 8, characterized in that the unit (16) of the valve cone (5) consists of a central portion (20) and a portion (21) concentrically surrounding the central portion (20) and contiguous with the central portion (20) by the intermediary of narrow interconnecting bridges (22) for the formation of channels (24) between the portions (20) and (21).

10. The homogenizer valve (1) as claimed in any of Claims 8 or 9, characterized in that from a central plane (19), the unit (16) of the valve cone (5) is designed such that it is identical on both sides of the central plane (19).

1/2

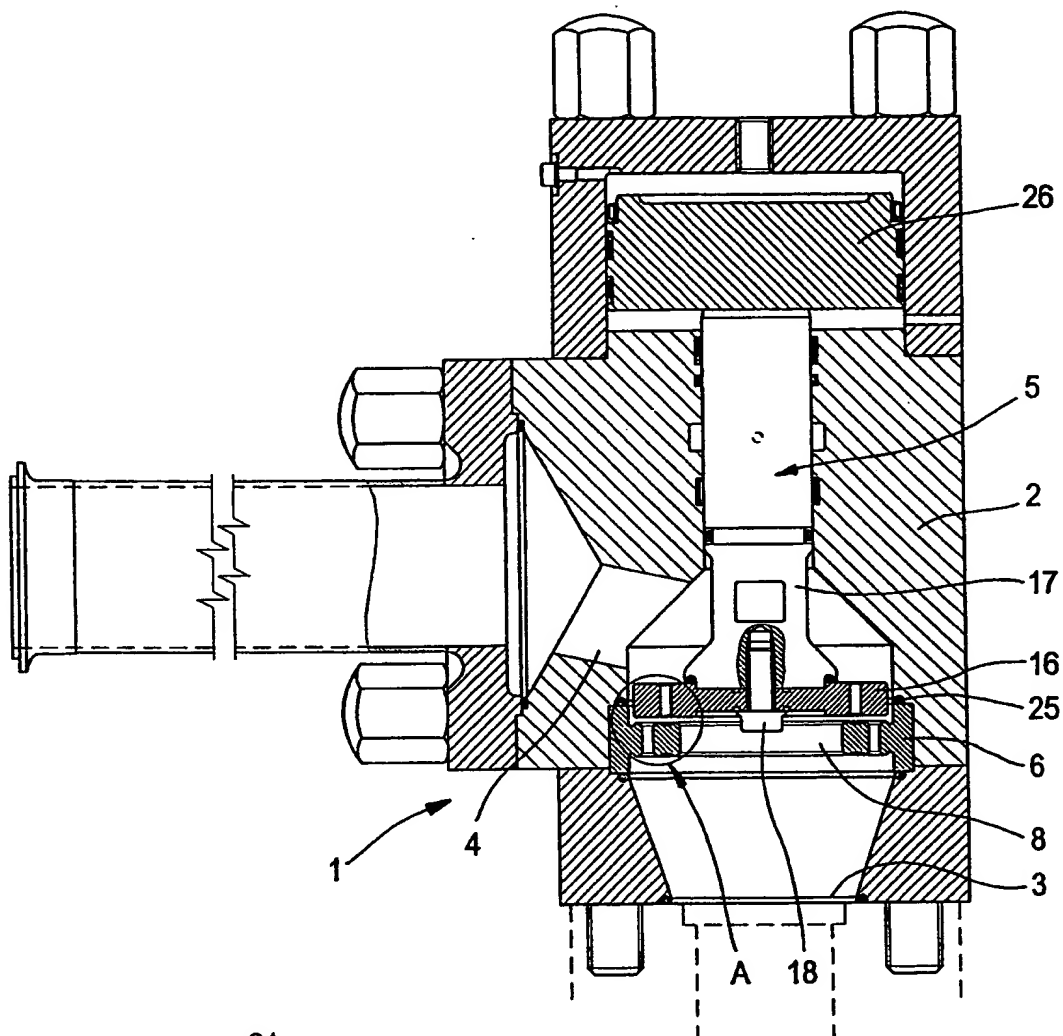


**Fig 1**

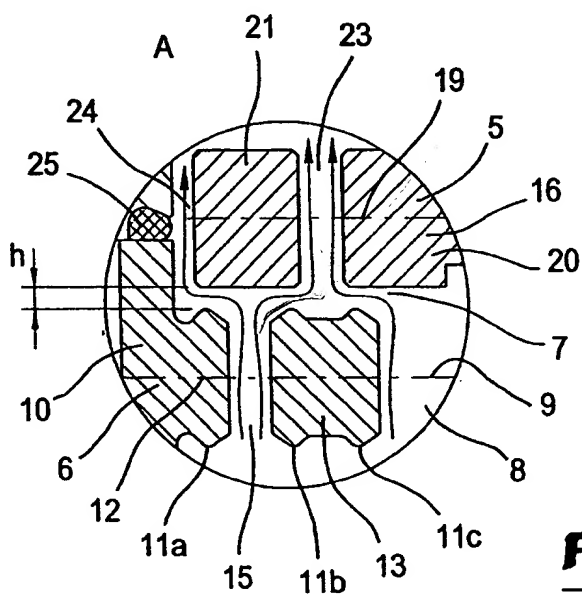


**Fig 2**

2/2

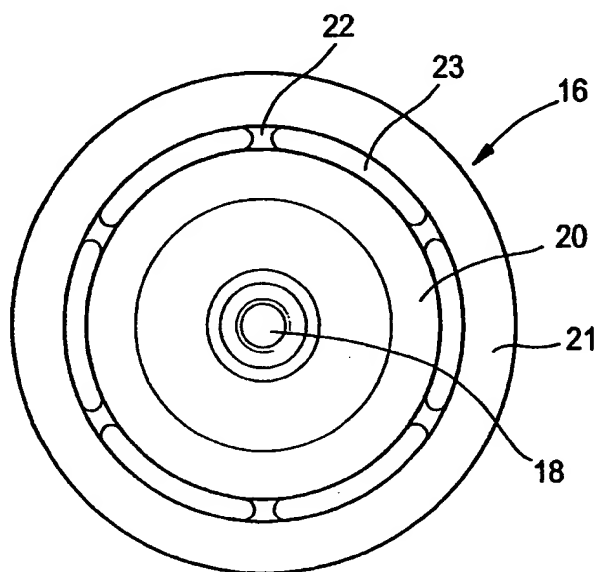

**Fig 3**

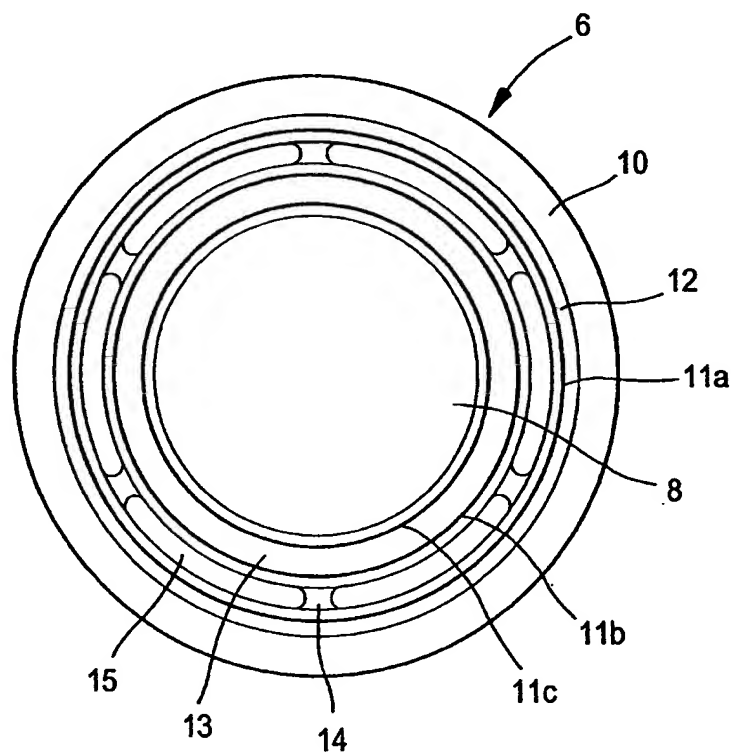

**Fig 4**

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 98/00720

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: B01F 3/08, B01F 5/06 // A01J 11/16

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: B01F, A01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

DIALOG: ALLSCIENCE

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 3728946 A1 (BRAN + LUEBBE GMBH), 9 March 1989 (09.03.89)  --	1
A	DK 123507 B (MASKINFABRIKEN RANNIE AKTIESELSKAB), 3 July 1972 (03.07.72)  -----	1

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

31 July 1998

Date of mailing of the international search report

06 -08- 1998

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Olov Jensen

Telephone No. +46 8 782 25 00

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

30/06/98

International application No.

PCT/SE 98/00720

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 3728946 A1	09/03/89	NONE	
DK 123507 B	03/07/72	SE 340268 B	15/11/71